

Insurice Twin-i2000² System

Delivers premium quality water for ice applications

EVERPURE[®]

APPLICATIONS

Ice machines

Cubers 1,450 lbs./day

Flakers 2,200 lbs./day

FEATURES AND BENEFITS

Reduces ice machine problems caused by scale build-up from dirt and dissolved minerals*.

New and improved Micro-Pure II media inhibits the growth of bacteria.

Reduces chlorine taste and odor and other offensive contaminants.

Reduces maintenance and service costs by reducing scale* and clogging of distribution lines, evaporator plate and pump.

Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size and reduces health contaminants such as cysts.

Manifold features water shut-off, flushing valve and outlet pressure gauge.

Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination.

NSF Certified under NSF/ANSI Standards 42 & 53.

*As tested by Everpure

OPERATIONAL TIPS

Change cartridges on a regular 6 month preventative maintenance program.

Change cartridges when capacity is reached or when pressure falls below 10 psi.

Service flow rate must not exceed 3.34 gpm.

Always flush the filter cartridge at time of installation and cartridge change.

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



Insurice Twin-i2000² System: EV9324-02
i2000² Replacement Cartridge: EV9612-22

SPECIFICATIONS

Overall Dimensions:	25.26" H x 16.6" W x 5.5" D (64.1 x 42.1 x 13.9 cm)
Inlet Connection:	3/4"
Outlet Connection:	3/4"
Service Flow Rate:	Maximum 3.34 gpm (12.6 Lpm)
Rated Capacity:	18,000 gallons (68,137 L)
Pressure Requirements:	10 – 125 psi (0.7 – 8.6 bar), non-shock
Temperature:	35 – 100°F (2 – 38°C)
Electrical Connection:	None
Shipping Weight:	12 lbs. (5.4 kg)
Operating Weight:	18 lbs. (8.1 kg)

Insurice Twin-i2000² System


EV9324-02

INSTALLATION TIPS

- Choose a mounting location suitable to support the full weight of the system when operating.
- Never use saddle valve for connection.
- Use 3/4" water line.
- Do not connect system to water-cooled condenser.
- Install vertically with cartridges hanging down and allow 2-1/2" clearance below the cartridge for easy cartridge replacement.
- Flush cartridges by running water through system for five minutes at full flow.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

EVERPURE reserves the right to update specifications, change prices, or make substitutions without notice.

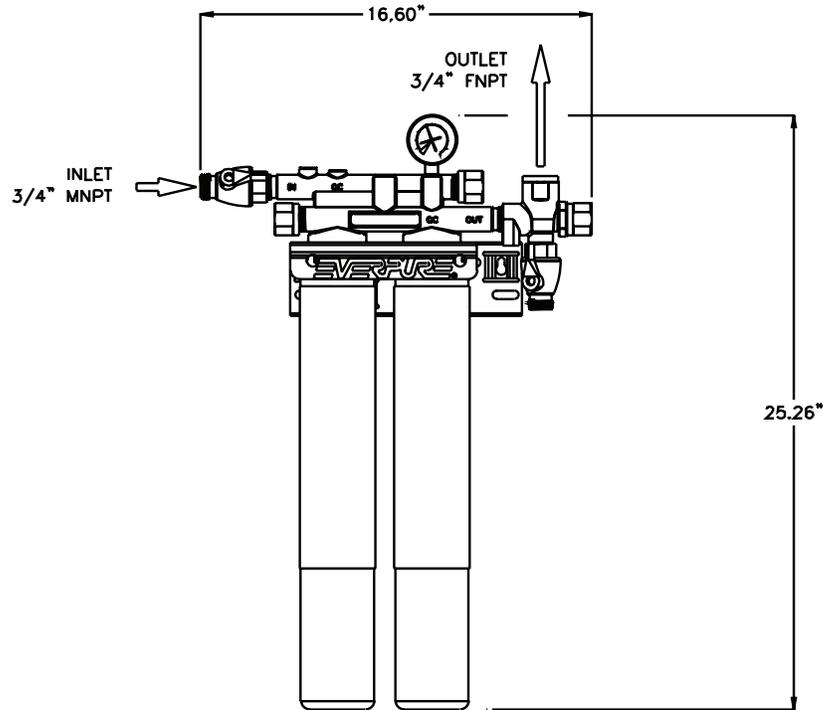

System Tested and Certified by NSF International against NSF/ANSI Standard 42 and 53 for the reduction of:

Standard No. 42 Aesthetic Effects
 Chemical Unit
 Taste and Odor Reduction
 Chlorine Reduction
 Mechanical Filtration Unit
 Particulate Reduction, Class I

Standard No. 53: Health Effects
 Mechanical Filtration Unit
 Turbidity Reduction
 Cyst Reduction
 Asbestos Reduction

Everpure-Shurflo India
 A-25
 Mohan Co-operative Industrial Estate
 Mathura Road
 New Dehli, 110 044
 INDIA
 TEL: 011.661.188.00
 FAX: 011.661.188.22

Everpure-Shurflo Japan Inc.
 Hashimoto MN Bldg. 7F
 3-25-1 Hashimoto, Midori-ku
 Sagami-hara-Shi Kanagawa 252-0143
 JAPAN
 TEL: 81.(0)42.775.3011
 FAX: 81.(0)42.775.3015

Everpure-Shurflo China
 21F Cloud 9 Plaza, No 1118,
 West Yan'an Road, Changning District
 Shanghai, 200052
 CHINA
 TEL: 86.21.3211.4588
 FAX: 86.21.3211.4580



WATER YOU CAN TRUST[®]

Visit our website at www.everpure.com

Pentair Filtration Solutions, LLC
 World Headquarters-Everpure/Shurflo
 North and South America Sales
 1040 Muirfield Dr.
 Hanover Park, Illinois 60133
 USA
 TEL: 800.323.7873 (US only)
 TEL: 630.307.3000
 FAX: 630.307.3030

Everpure-Shurflo Australia
 2 Redwood Drive
 Notting Hill
 Victoria, 3168
 AUSTRALIA
 TEL: 011.61.39.574.4000
 FAX: 011.61.39.562.7237

Everpure-Shurflo Southeast Asia
 18 Boon Lay Way
 #04-110/111
 TradeHub 21, 609966
 SINGAPORE
 TEL: 65.6795.2213
 FAX: 65.6795.2219

Everpure-Shurflo Europe bvba
 Industripark Wolfstee
 Toekomstlaan 30
 B-2200 Herentals
 BELGIUM
 TEL: +32.(0).14.283.500
 FAX: +32.(0).14.283.505